## FS560 PLUS OVER-THE-HIGHWAY All-Position Radial

## CLASSIC




Designed for demanding jobs in high scrub environments, the all-position Firestone FS560 PLUS offers features that contribute to long original mileage and strong traction, helping you go the distance in truckload, less-than-truckload, distribution, and pickup & delivery applications.

\* LOW PROFILE PATTERN SHOWN HERE

## Firestone

## FS560 PLUS FEATURES & BENEFITS

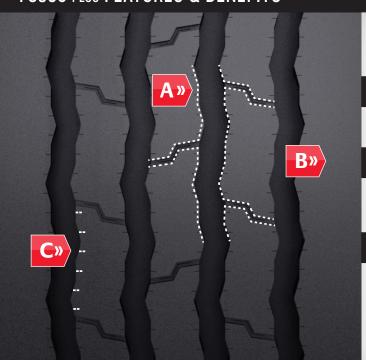

- WIDE FLOW-THROUGH GROOVES AND CROSS-RIB SIPES
- enhance wet traction
- SOLID SHOULDER DESIGN

stabilizes tread to resist side forces of high scrub environments and promote even wear

STRESS RELIEF SIPES

fight irregular wear on main ribs by absorbing rib edge stresses in the footprint





|                         |               |                   |                    | Mass                 | Overell                        | Overell                     | Static                      | Overall                    |                       | Max Load Capacity          |                    |                         |                                    |                        |
|-------------------------|---------------|-------------------|--------------------|----------------------|--------------------------------|-----------------------------|-----------------------------|----------------------------|-----------------------|----------------------------|--------------------|-------------------------|------------------------------------|------------------------|
| FS560 PLUS<br>TIRE SIZE | Load<br>Range | Article<br>Number | Weight<br>[lbs/kg] | Meas.<br>Rim<br>[in] | Overall<br>Diameter<br>[in/mm] | Overall<br>Width<br>[in/mm] | Loaded<br>Radius<br>[in/mm] | Width<br>Loaded<br>[in/mm] | Revs<br>[per mile/km] | Tread<br>Depth<br>[32"/mm] | Single<br>[lbs/kg] | <b>Dual</b><br>[lbs/kg] | Inflation<br>Pressure<br>[PSI/kPa] | Max Speed<br>[mph/kph] |
| 11R22.5 ◆<br>metric     | G             | 156-531           | 114<br>52          | 8.25                 | 41.3<br>1050                   | 10.8<br>275                 | 19.3<br>491                 | 11.8<br>300                | 503<br>312            | 19<br>15                   | 6175<br>2800       | 5840<br>2650            | 105<br>720                         | 75<br>120              |
| 11R22.5 ◆<br>metric     | Н             | 156-558           | 114<br>52          | 8.25                 | 41.3<br>1050                   | 10.8<br>275                 | 19.3<br>491                 | 11.8<br>300                | 503<br>312            | 19<br>15                   | 6610<br>3000       | 6005<br>2725            | 120<br>830                         | 75<br>120              |
| 11R24.5 ◆<br>metric     | G             | 156-574           | 122<br>55          | 8.25                 | 43.3<br>1101                   | 10.7<br>272                 | 20.3<br>516                 | 11.7<br>297                | 480<br>298            | 19<br>15                   | 6610<br>3000       | 6005<br>2725            | 105<br>720                         | 75<br>120              |
| 11R24.5 ◆<br>metric     | Н             | 156-582           | 122<br>55          | 8.25                 | 43.3<br>1101                   | 10.7<br>272                 | 20.3<br>516                 | 11.7<br>297                | 480<br>498            | 19<br>15                   | 7160<br>3250       | 6610<br>3000            | 120<br>830                         | 75<br>120              |
| 255/70R22.5<br>metric   | Н             | 192-982           | 93<br>42           | 8.25                 | 36.7<br>933                    | 10.3<br>262                 | 17.1<br>435                 | 11.3<br>287                | 567<br>352            | 18<br>14                   | 5510<br>2500       | 5070<br>2300            | 120<br>830                         | 75<br>120              |
| 295/75R22.5<br>metric   | G             | 156-566           | 111<br>50          | 8.25                 | 40.3<br>1024                   | 10.9<br>277                 | 18.8<br>478                 | 11.8<br>300                | 515<br>320            | 19<br>15                   | 6175<br>2800       | 5675<br>2575            | 110<br>760                         | 75<br>120              |
| 285/75R24.5<br>metric   | G             | 156-590           | 116<br>52          | 8.25                 | 41.5<br>1055                   | 10.6<br>269                 | 19.5<br>496                 | 11.9<br>302                | 501<br>311            | 19<br>15                   | 6175<br>2800       | 5675<br>2575            | 110<br>760                         | 75<br>120              |

Warranty and additional technical information is available at FirestoneTruckTires.com, or from your dealer or truck stop.

TREAD DESIGN DIFFERENT FROM ONE SHOWN ABOVE
TREAD DESIGN DIFFERENT FROM ONE SHOWN ABOVE

Driven by innovation for more than 100 years, Firestone has a tire that's right for you and your business. See why we like to say that those with passion, those with ambition and those with drive ... Drive a Firestone.

TO LEARN MORE, VISIT FIRESTONETRUCKTIRES.COM

