



FD663 *MULTIPLE-USE* Drive Tire

CLASSIC




OUTSTANDING TRACTION & DURABLE

The Firestone FD663 tire is an over-the-highway drive tire recommended for high traction and high scrub application in long haul, regional and P&D services. Deep lugs provide biting edges for exceptional grip in inclement weather. Lateral shoulder channels provide pathways for the evacuation of water, slush or debris, assuring maximum road contact. Adjacent lugs joined with tie-bars enhance tread stability and ride comfort as well as minimize irregular wear. This unique combination of long tread life, outstanding traction and reliable durability make the FD663 the perfect tire to satisfy the demands of today's trucking fleets.

Firestone

FD663 FEATURES & BENEFITS

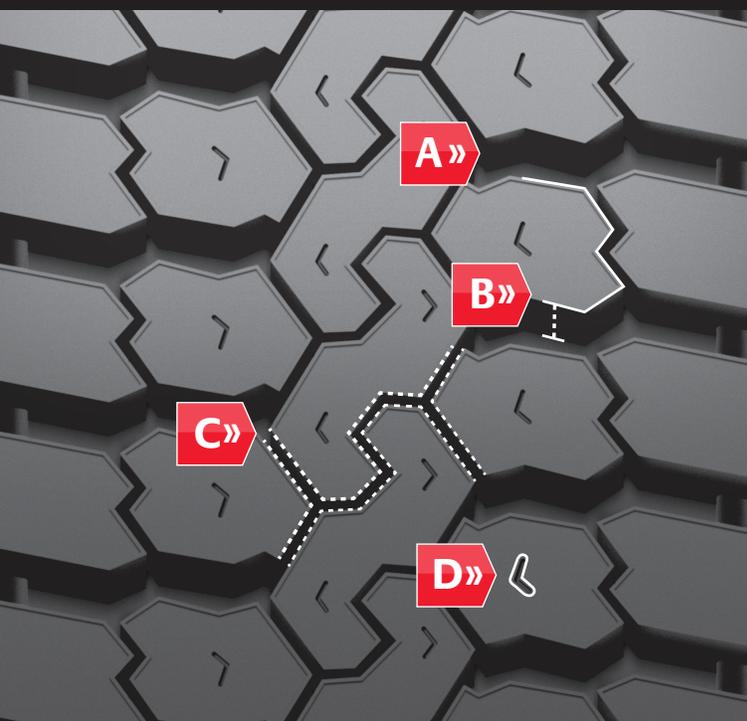

A **LATERAL SHOULDER CHANNELS**
channels water and slush out of the footprint for improved traction

B **DEEP LUGS WITH MULTIPLE GRIPPING EDGES**
provide biting edges for exceptional grip

C **WIDE FLOW-THROUGH GROOVES**
enhance wet traction

D **BLOCK SIPES**
provide traction by slicing through water for a solid grip on wet roads



DEEP HORIZONTAL LUGS


for long original tread life and improved traction

ADJACENT LUG TIE-BARS

promote uniform wear and exceptional tread life

CAP/BASE COMPOUNDING

combines a slow wearing cap compound with a cool running base that shields the casing from damaging heat to enhance retreadability.

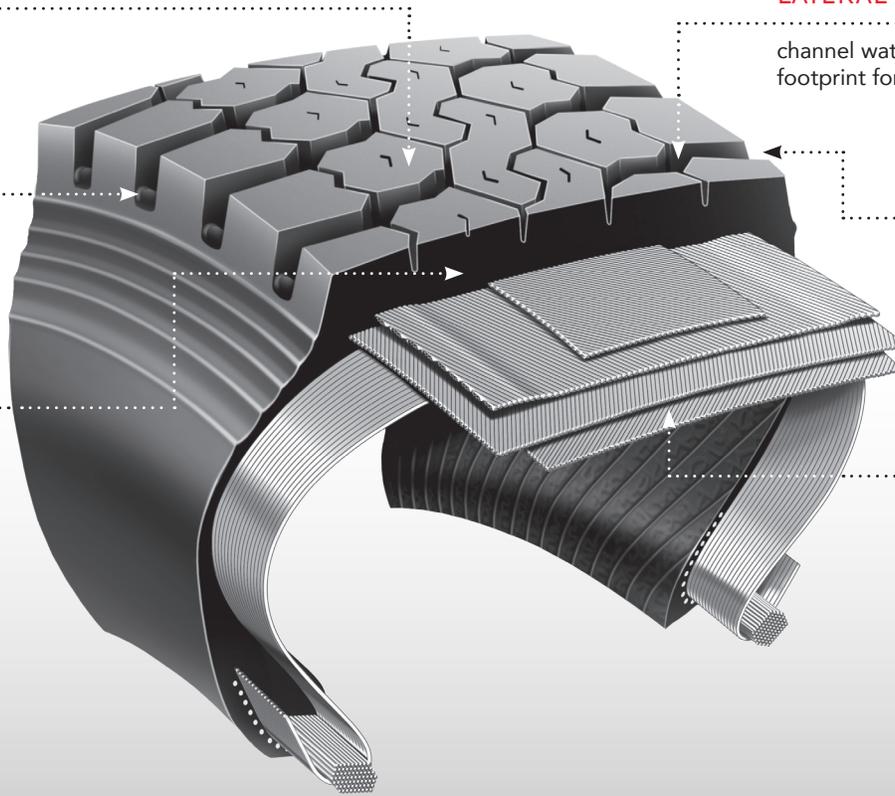

LATERAL SHOULDER CHANNELS

channel water and slush out of the footprint for improved traction

OPEN SHOULDER TREAD DESIGN

helps provide traction and grip in mud and snow

FOUR-BELT CONSTRUCTION

four steel belts help casing durability and enhance retreadability by combating casing penetration

FD663 TIRE SIZE	Load Range	Article Number	Weight [lbs/kg]	Meas. Rim [in]	Overall Diameter [in/mm]	Overall Width [in/mm]	Static Loaded Radius [in/mm]	Overall Width Loaded [in/mm]	Revs [per mile/km]	Tread Depth [32"/mm]	Max Load Capacity		Inflation Pressure [PSI/kPa]	Max Speed [mph/kph]
											Single [lbs/kg]	Dual [lbs/kg]		
10R22.5 metric	F	281-034	110 50	7.50	40.5 1029	9.8 249	18.9 480	10.8 274	513 319	25 20	5205 2360	4940 2240	100 690	75 120
11R22.5 metric	G	281-042	125 57	8.25	41.9 1064	10.7 272	19.5 495	11.8 300	496 308	26 21	6175 2800	5840 2650	105 720	75 120
11R22.5 metric	H	211-206	125 57	8.25	41.9 1064	10.8 274	19.5 495	11.9 302	496 308	26 21	6610 3000	6005 2725	120 830	75 120
12R22.5 metric	H	151-009	154 70	9.00	43 1092	11.6 295	20 508	12.6 320	483 300	26 21	7390 3350	6780 3075	120 830	75 120
11R24.5 metric	G	281-069	133 60	8.25	43.9 1115	10.7 272	20.5 521	11.8 300	473 294	26 21	6610 3000	6005 2725	105 720	75 120
11R24.5 metric	H	293-733	134 61	8.25	43.9 1115	10.7 272	20.5 521	11.8 300	473 294	26 21	7160 3250	6610 3000	120 830	75 120
295/75R22.5 metric	G	281-050	117 53	8.25	40.6 1031	11.1 282	18.9 480	12.2 310	512 318	26 21	6175 2800	5675 2575	110 760	75 120
285/75R24.5 metric	G	281-077	122 55	8.25	41.9 1064	10.6 269	19.6 498	11.7 297	496 308	26 21	6175 2800	5675 2575	110 760	75 120

Warranty and additional technical information is available at FirestoneTruckTires.com, or from your dealer or truck stop.

Driven by innovation for more than 100 years, Firestone has a tire that's right for you and your business. See why we like to say that those with passion, those with ambition and those with drive ... Drive a Firestone.

TO LEARN MORE, VISIT FIRESTONETRUCKTIRES.COM